



NO.	REVISION HISTORY	DATE	SIGNED	CHECKED	APPROVED
A	change of resistance value (15.3~18.7→ 16.0~19.6)	17.11.08			

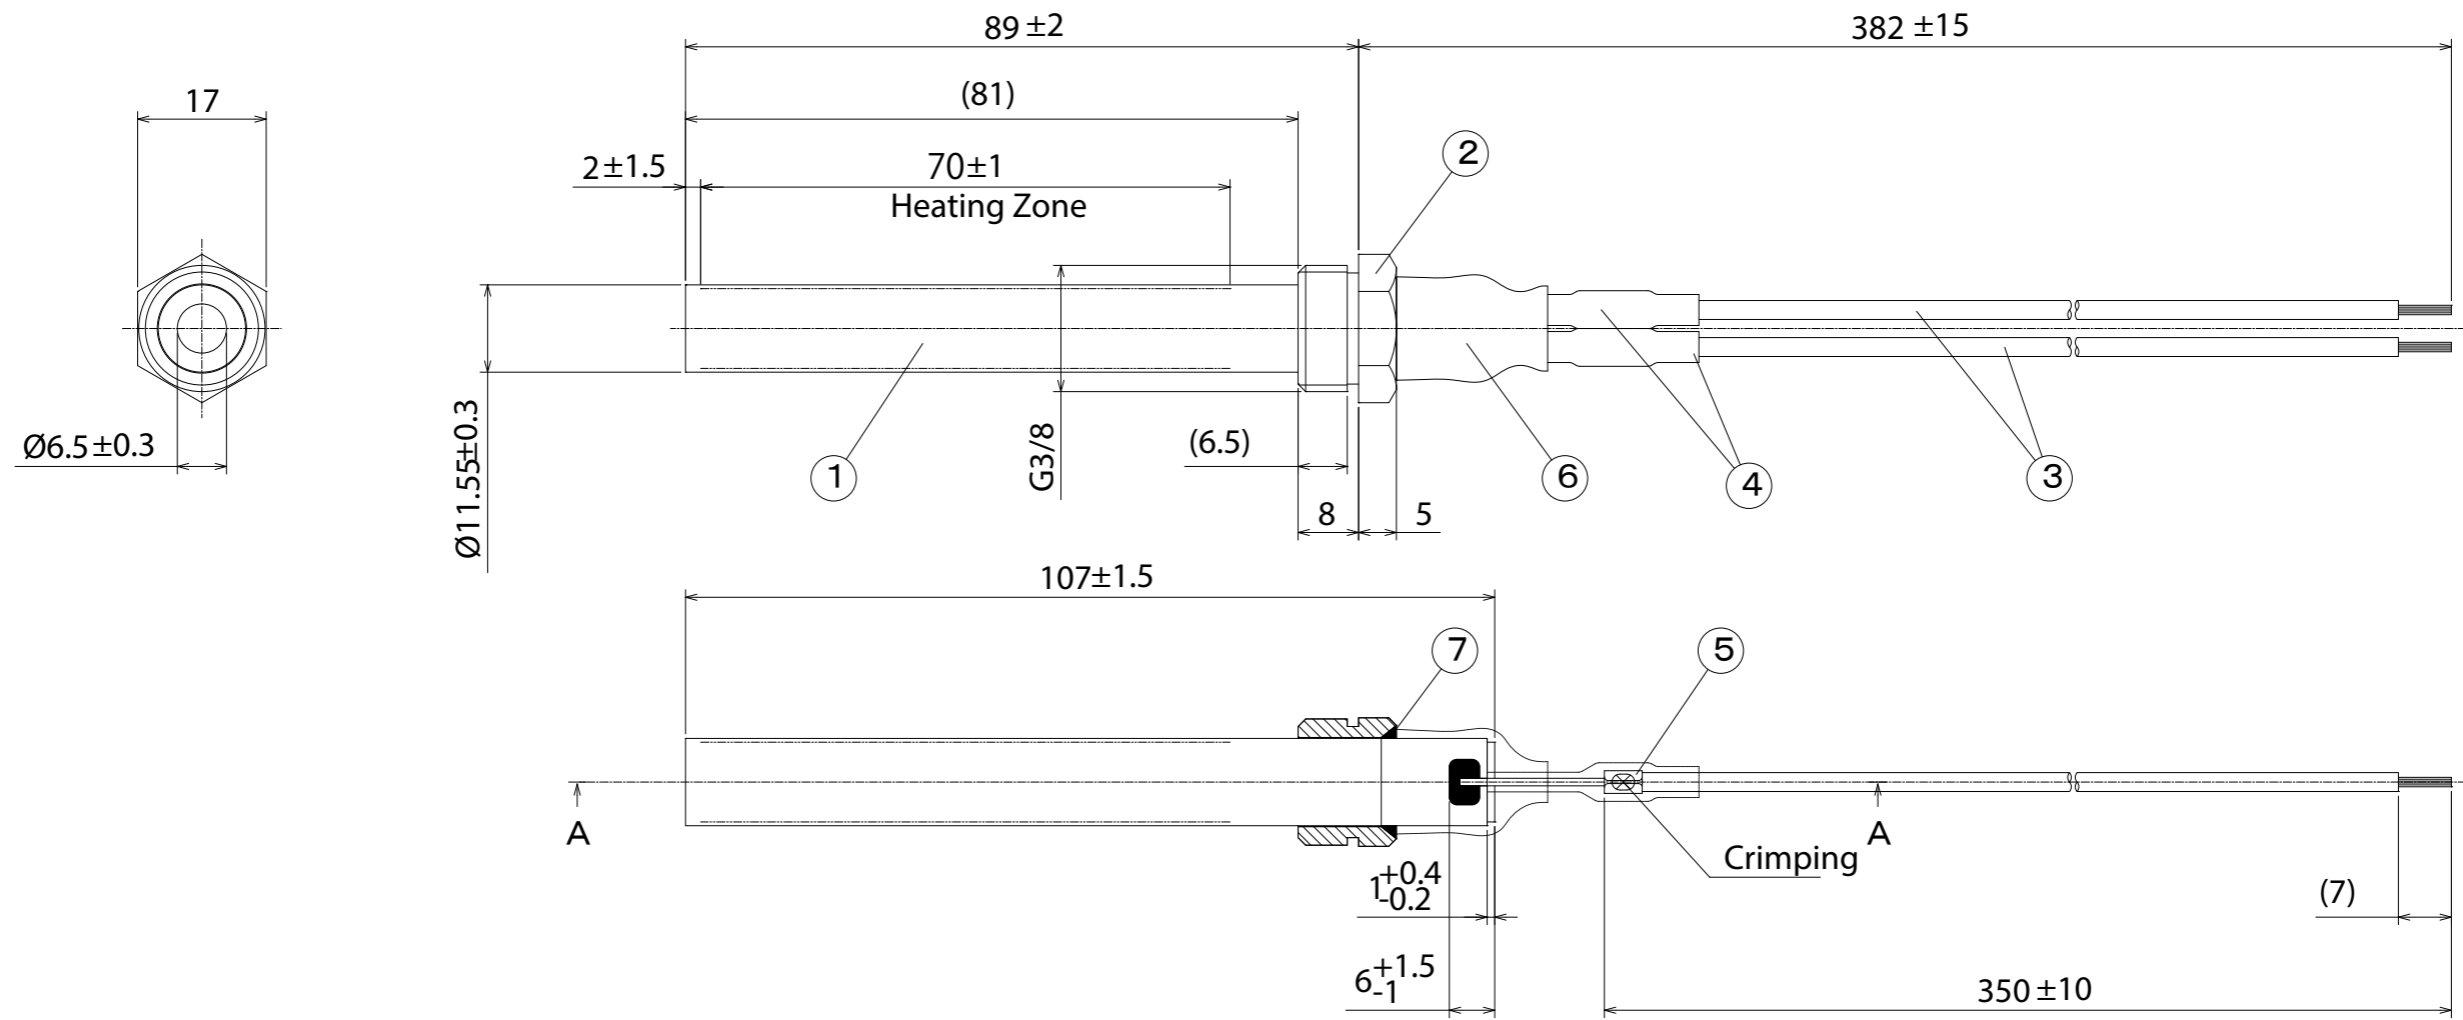

(Specifications)

Properties	Value	Condition
Voltage	AC120V ±10%	50/60Hz
Normal temperature resistance	16.0~19.6 Ω	23±1 °C ambient temperature
Insulation resistance	Over 50MΩ	Applied at both side of Heating element DC500V at normal temperature and humidity
Withstand voltage	Current Leakage below 5mA	Applied at both side of Heating element AC1500V for 1 s at normal temperature and humidity rate
Caulking strength (Nickel wire and lead wire)	Over 29.4N	The nickel wire has been clamp and the lead part has been tested with push-pull gauge
Discontinuous conduction (Heating element)	Without break	Applied at 132V for 4 min On/5 min off (Forced cooling) for over 3000 cycles.

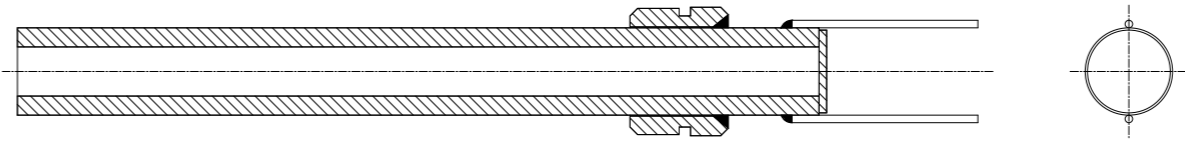

CROSS SECTION A-A

(Statements)

1. This product comply with RoHS and REACH standard.

NO.	NAME	PCS.	DRAWING NO.	MATERIAL/DIMENSION	MODEL NUMBER	OTHER
7	CERAMIC SEALING			FUJICERAM-W		
6	HEAT SHRINKABLE TUBE	1	FEA-TS003	SST, Ø16×20L	SILICONE	
5	CRIMP CONNECTOR	2		Cu, tin-plating	29071-1	
4	HEAT SHRINKABLE TUBE	2	FEA-TS012	SST, Ø4×28L	SILICONE	
3	LEAD WIRE	2	FEA-RG092	RS-GE, 0.5sq, W	SILICONE-GLASS	180°C
2	MOUNTING	1	FEA-KN058	BRASS, G3/8		
1	HEATING ELEMENT	1	FEA-EA042	ALUMINA(A473)	LCR-3B-120VFL	

NAME		PSx-6-120-W	
(FKK-Standard Pellet system heater)			
MATERIAL		DATE 2015.10.26	
APPROVED		THIRD ANGLE PROJECTION	CODE
CHECKED			
CHARGED			
DESIGNED		SCALE	DRAWING NO.
DRAWN	Y.Fujimoto	1:1	IBA-HH024
			REV A

Proprietary statement

This drawings is the proprietary of FKK Corporation. In case of non-respect of the present term, FKK may take action and ask for damages.

FKK CORPORATION